

QCT-MCB-RG6-75

TNC Male, Crimp

Features:

* Low VSWR

Applications:

* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
Dielectric Withstanding Voltage:	1500V RMS, 50Hz, at sea level, min.
Working Voltage:	750V RMS, 50Hz, at sea level, max.
Impedance of Dielectric:	5000MΩ min.
Impedance of Contact (Center):	1.5mΩ max.
Impedance of Contact (Outer):	0.2mΩ max.
Impedance:	75Ω


Mechanical

RF Connector:	TNC male
Mating Life Cycle:	500 cycles min.
Mating Cable:	RG6-75
Outer Conductor:	Nickel plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated brass
ROHS Compliant:	Full ROHS compliance

Environmental

Temperature:	-45~+125°C
--------------	------------

Outline Drawings

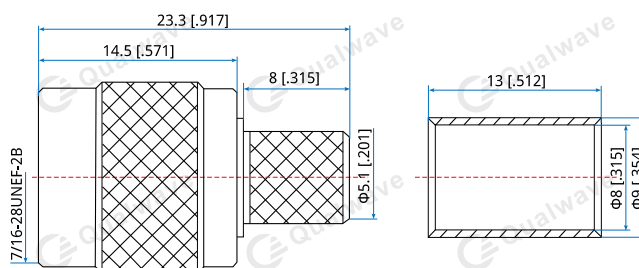

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QCT-MCB-RG6-75

Customization is available upon request.