

QWCK-112

WR-112, 6.57~9.99GHz


Features:
 * Broad Band
 * Low VSWR

Applications:
 * Calibration
 * Laboratory Test

Components

Part Number	Frequency	VSWR	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
	(GHz)	(Max.)						
QWCA-112-SF-R-1	6.57-9.99	1.25	Waveguide to coax adapter, WR-112 (BJ84) to SMA(f), right angle, FBP84	Aluminium	Conductive oxidation	Sea gray	2	Outline A
QWT112-4-A-1	6.57-9.99	1.03	Low power waveguide termination, WR-112 (BJ84), 4W, FBP84	Aluminium	Conductive oxidation	Sea gray	1	Outline B
QWS112-A-1	6.57-9.99	-	Waveguide short, WR-112 (BJ84), 10mm, FBP84	Aluminium	-	-	1	Outline D
QWSS112-X-A-1	6.57-9.99	-	1/4λ Waveguide straight section, WR-112 (BJ84), Xmm, FBP84	Aluminium	-	-	1	Outline C
Storage Box	Aluminum Alloy						1	-
Screw							1 set	-

Outline Drawings

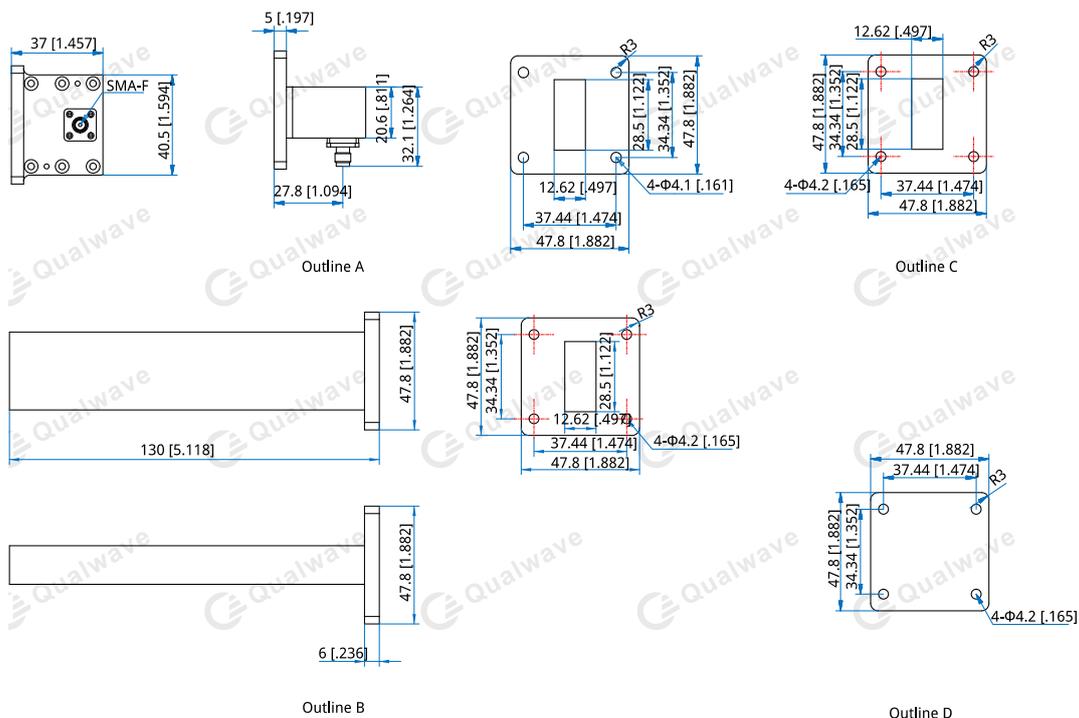

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Environmental

Operating Temperature: -40~+85°C

Non-operating Temperature: -55~+150°C

How To Order**QWCK-112** All the 5 components in one box.