

QWCK-34

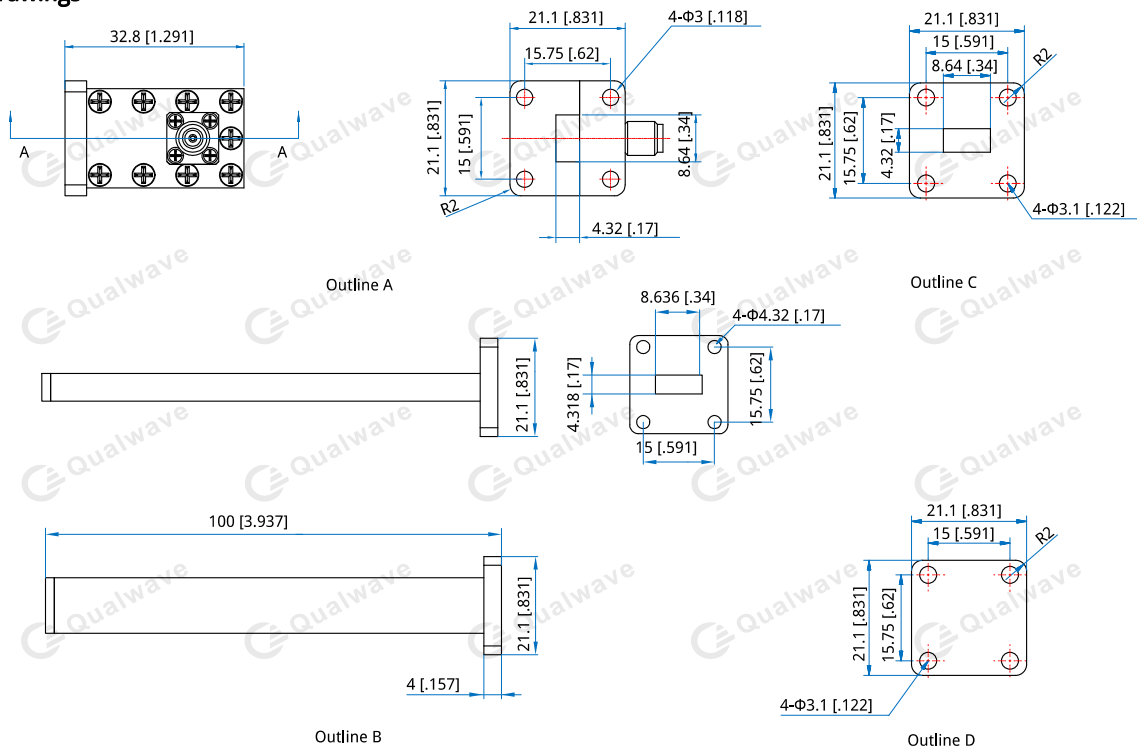
WR-34, 21.7~33GHz

Features:
 * Broad Band
 * Low VSWR

Applications:
 * Calibration
 * Laboratory Test

Components

Part Number	Frequency (GHz)	VSWR (Max.)	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
QWCA-34-KF-R-1	21.7~33	1.2	Waveguide to coax adapter, WR-34 (BJ260) to 2.92mm(f), right angle, FBP260	Copper	Pickling passivation	Black paint	2	Outline A
QWT34-R5-A-1	21.7~33	1.03	Low power waveguide termination, WR-34 (BJ260), 0.5W, FBP260	Aluminium	Conductive oxidation	Sea gray	1	Outline B
QWS34-A-1	21.7~33	-	Waveguide short, WR-34 (BJ260), 3mm, FBP260	Aluminium	-	-	1	Outline D
QWSS34-X-A-1	21.7~33	-	1/4λ Waveguide straight section, WR-34 (BJ260), Xmm, FBP260	Aluminium	-	-	1	Outline C
Storage Box	Aluminum Alloy						1	-
Screw							1 set	-

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Environmental

Operating Temperature: -33~+85°C

Non-operating Temperature: -55~+150°C

How To Order**QWCK-34** All the 5 components in one box.