

QA1G3

1.0mm to SMPS (SSSMP, G3PO)

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~100GHz
VSWR:	1.5 max.
Impedance:	50Ω

Mechanical

RF Connectors:	1.0mm
	SMPS (SSSMP, G3PO)
Outer Conductor:	Stainless steel UNS S30300 (Outline A, C) Beryllium copper UNS C17300 (Outline B, D)
Dielectric:	PEI
Inner Conductor:	Beryllium copper UNS C17300

How To Order

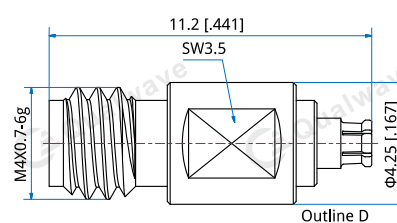
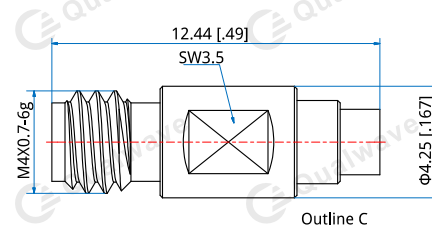
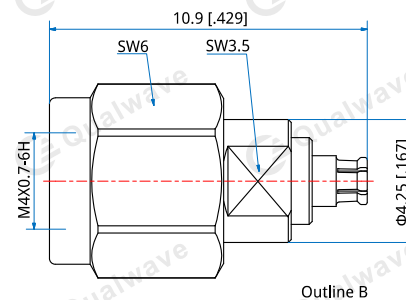
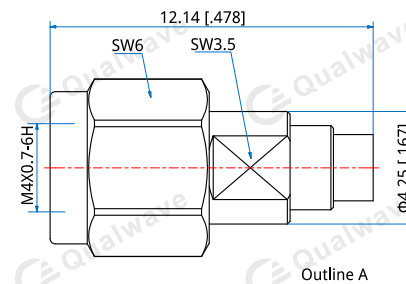
QA1G3-MM - 1.0mm (m) to SMPS (SSSMP, G3PO) (m), Outline A

QA1G3-MF - 1.0mm (m) to SMPS (SSSMP, G3PO) (f), Outline B

QA1G3-FM - 1.0mm (f) to SMPS (SSSMP, G3PO) (m), Outline C

QA1G3-FF - 1.0mm (f) to SMPS (SSSMP, G3PO) (f), Outline D

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

