

QA22

2.4mm to 2.4mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~50GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical

RF Connectors: 2.4mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated stainless steel
Dielectric: PEI
Inner Conductor: Gold plated beryllium copper
or gold plated brass

Environmental

Temperature: -60~+165°C

How To Order

QA22-MM - 2.4mm(m) to 2.4mm(m), Outline A

QA22-MF - 2.4mm(m) to 2.4mm(f), Outline B

QA22-FF - 2.4mm(f) to 2.4mm(f), Outline C

QA22R-MM - 2.4mm(m) to 2.4mm(m), right angle, Outline D

QA22R-MF - 2.4mm(m) to 2.4mm(f), right angle, Outline E


QA22R-FF - 2.4mm(f) to 2.4mm(f), right angle, Outline F

QA22L-FF - 2.4mm(f) to 2.4mm(f), flange mount, Outline G

QA22H-FF - 2.4mm(f) to 2.4mm(f), bulk head, Outline H

Customization is available upon request.

Outline Drawings

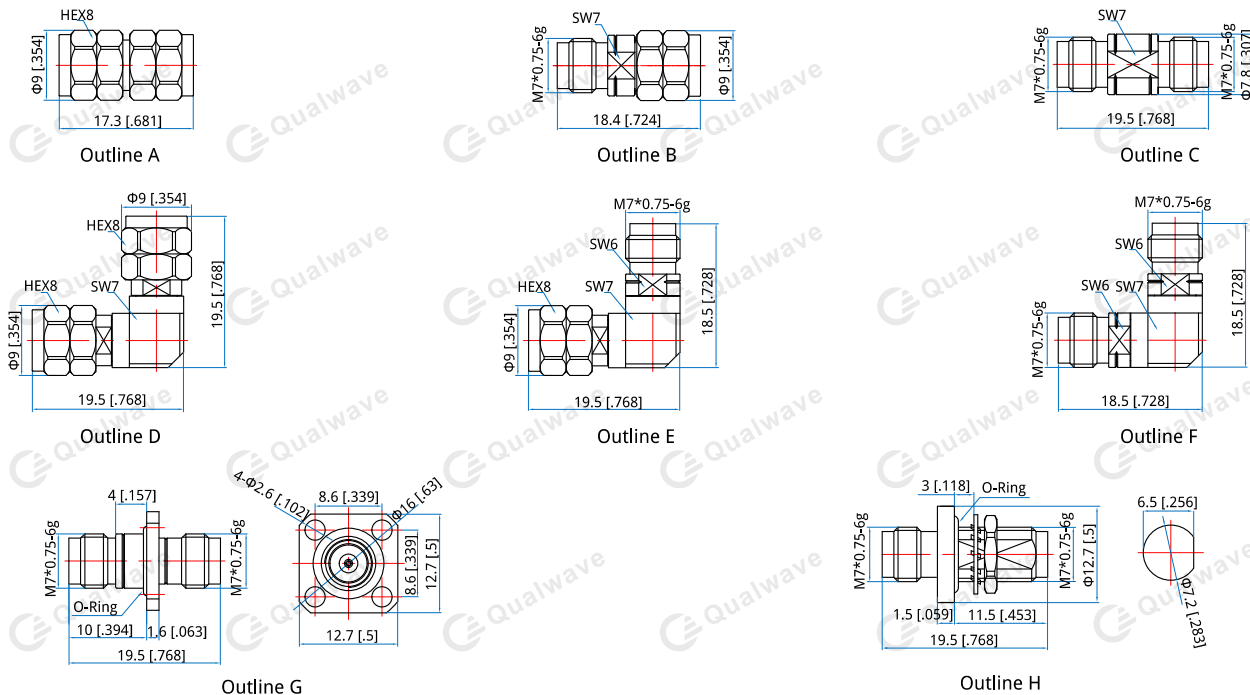

Unit: mm [in] Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]