

## QAMKMK

NMD 2.92mm to NMD 2.92mm

### Features:

\* Low VSWR

### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	DC~40GHz
VSWR:	1.2 max.
Impedance:	50Ω


### Mechanical

RF Connectors:	NMD 2.92mm
Mating Life Cycle:	2000 cycles max.
Outer Conductor:	Passivated SUS303 stainless steel
Dielectric:	PEEK
Inner Conductor:	Gold plated beryllium copper

### Environmental

Temperature:	-55~+165°C
--------------	------------

### Outline Drawings

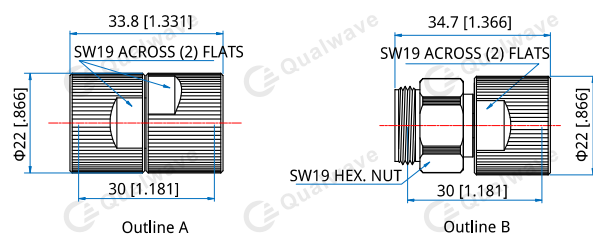

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QAMKMK-FF** - NMD 2.92mm(f) to NMD 2.92mm(f), Outline A

**QAMKMK-MF** - NMD 2.92mm(m) to NMD 2.92mm(f), Outline B

Customization is available upon request.