

QAP3

SMP to 3.5mm

Features:

* Low VSWR

Applications:

* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~26.5GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000MΩ min.
Dielectric Withstanding	1000V
Voltage:	
Impedance:	50Ω

Mechanical

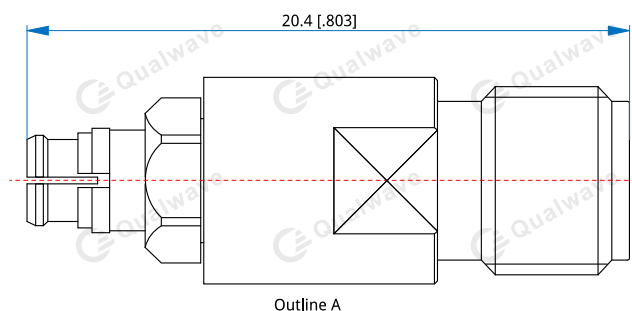
RF Connectors:	SMP female
	3.5mm female
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated beryllium copper & Passivated stainless steel
Dielectric:	PEI & PTFE
Inner Conductor:	Gold plated beryllium copper

How To Order
QAP3-FF - SMP (f) to 3.5mm (f), Outline A

Customization is available upon request.

Environmental

Temperature: -55~+165°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]