

QAST SMA to TNC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.2max.
1.3max. (Outline F)
Impedance: 50Ω

Mechanical

RF Connectors: SMA
TNC
Outer Conductor: Passivated stainless steel
Dielectric: PEI & PTFE or PTFE
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -50~+85°C
-55~+165°C(bulk head)

How To Order

QAST-MM - SMA (m) to TNC (m), Outline A

QAST-MF - SMA (m) to TNC (f), Outline B

QAST-FM - SMA (f) to TNC (m), Outline C


QAST-FF - SMA (f) to TNC (f), Outline D

QASTL-FF - SMA (f) to TNC (f), Flange mount, Outline E

QASTH-FF - SMA (f) to TNC (f), Bulk head, Outline F

Customization is available upon request.

Outline Drawings

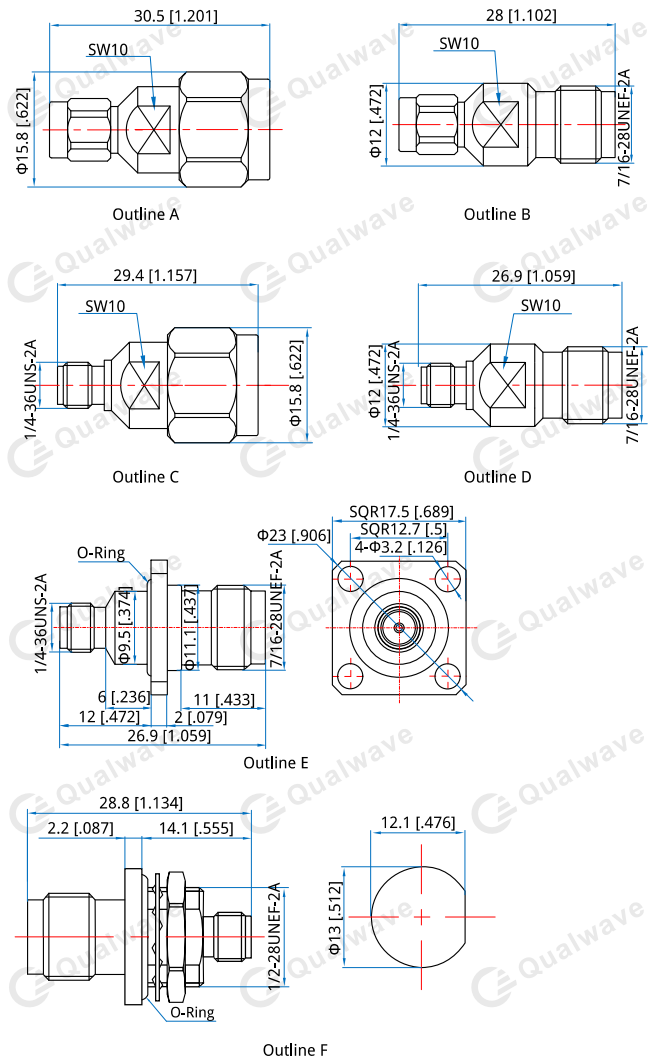

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]