

QASX

SMA to MMCX

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~6GHz
VSWR:	1.15 max.
Impedance of Dielectric:	5000MΩ min.
Dielectric Withstanding	1000V
Voltage:	
Impedance:	50Ω


Mechanical

RF Connectors:	SMA
	MMCX
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

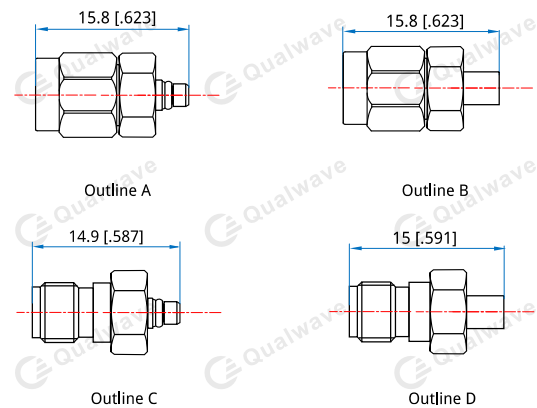

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QASX-MM - SMA(m) to MMCX(m), Outline A

QASX-MF - SMA(m) to MMCX(f), Outline B

QASX-FM - SMA(f) to MMCX(m), Outline C

QASX-FF - SMA(f) to MMCX(f), Outline D

Customization is available upon request.