

## **Coaxial Circulator**

# QCC-290-320-K8-7-1 0.29~0.32GHz, 800W, 7/16 DIN Female

- Features:
- \* Broadband
- \* High Power
- Applications: \* Wireless
- \* Low Insertion Loss
- \* Radar
- \* Laboratory Test

80\*60\*60mm

3.15\*2.362\*2.362in

7/16 DIN Female

Clockwise  $1 \rightarrow 2 \rightarrow 3$ 

### Electrical

Frequency:	0.29~0.32GHz
Insertion Loss:	0.4dB max.
Isolation:	20dB min.
VSWR:	1.25 max.
Average Power:	800W
Peak Power:	1000W

#### Mechanical


Size<sup>\*1</sup>: **RF** Connectors: Direction:

[1] Exclude connectors.

#### Environmental

Temperature: -10~+70°C

### **Outline Drawings**

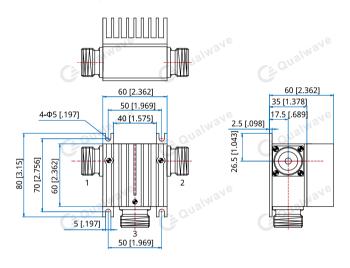

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]

## How To Order QCC-290-320-K8-7-1

Customization is available upon request.