

QCI3538X

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Description

QCI3538X series Coaxial Isolators cover frequency range 300~1850MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.



Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power (W Max.)	Rev Power (W)	Connector	Temperature (°C)
300~350	50	0.70	18.0	1.35	300 ^{*1}	10~100	SMA, N	-30~+70
300~400	20	0.40	20.0	1.25	300 ^{*1}	10~100	SMA, N	-30~+70
350~370	20	0.40	23.0	1.20	300 ^{*1}	10~100	SMA, N	-30~+70
350~400	50	0.70	16.0	1.40	100	20	N	-30~+75
361~366	5	0.40	23.0	1.20	300 ^{*1}	10~100	SMA, N	-30~+70
400~470	70	0.40	20.0	1.25	300 ^{*1}	10~100	SMA, N	-30~+70
470~570	100	0.40	20.0	1.25	300 ^{*1}	10~100	SMA, N	-30~+70
500~700	200	0.70	17.0	1.35	100	20	SMA	-40~+85
500~700	200	0.65	18.0	1.30	200	100	SMA	-40~+85
500~700	200	0.70	18.0	1.30	300	30	SMA	-30~+75
600~800	200	0.60	16.0	1.40	300	20	N	-30~+75
700~900	200	0.40	20.0	1.25	200	30	N	-30~+75
700~1000	300	0.70	15.0	1.50	300	100	N	0~+60
800~1000	200	0.40	18.0	1.25	100	20	SMA	-40~+85
800~1000	200	0.40	20.0	1.25	100	20	N	-30~+75
950~1450	500	0.60	18.0	1.30	300 ^{*1}	10~100	SMA, N	-30~+70
960~1215	255	0.30	21.0	1.20	300 ^{*1}	10~100	SMA, N	-30~+70
960~1260	300	0.45	20.0	1.25	300 ^{*1}	10~100	SMA, N	-30~+70
960~1260	300	0.40	20.0	1.25	100	20	SMA	-40~+85
1000~1500	500	0.60	18.0	1.30	300 ^{*1}	10~100	SMA, N	-30~+70
1020~1040	20	0.25	25.0	1.15	300 ^{*1}	10~100	SMA, N	-30~+70
1160~1610	450	0.50	20.0	1.25	300 ^{*1}	10~100	SMA, N	-30~+70
1290~1310	20	0.25	25.0	1.15	300 ^{*1}	10~100	SMA, N	-30~+70
1350~1850	500	0.50	20.0	1.25	300 ^{*1}	10~100	SMA, N	-30~+70

The size of the termination varies according to the reverse power

[1] The connector is SMA, and the maximum forward power can only reach 100W.

Outline Drawings

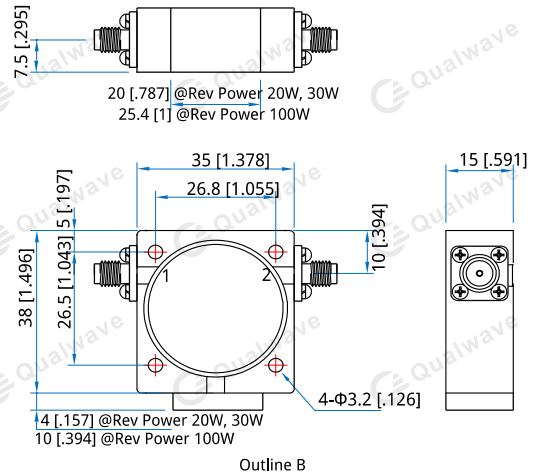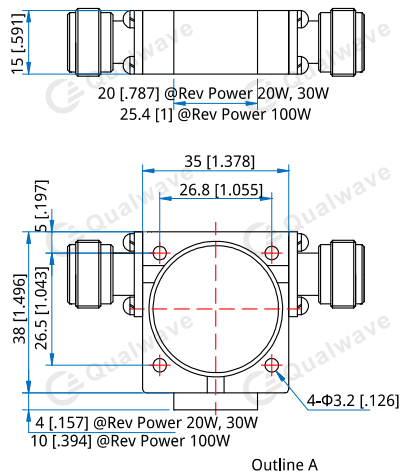

Unit: mm [inch] Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Mechanical

Size^{*2}: 35*38*15mm
1.378*1.496*0.591in

Mounting: 4-Φ3.2mm through-hole

[2] Exclude connectors and terminations.

Connector Naming Rules:

N - N Female (Outline A)
S - SMA Female (Outline B)

Direction Naming Rules:

1 - Clockwise
2 - Anticlockwise

How To Order

QCI3538X-U-V-W-X-Y-Z

U: Start frequency in MHz

V: Stop frequency in MHz

W: Forward power in W

X: Reverse power in W

Y: Connector type

Z: Direction type

Examples:

To order a QCI3538X series Isolator, 300~350MHz, Forward power 300W, Reverse power 100W, N female, Clockwise, specify QCI3538X-300-350-K3-K1-N-1.

Customization is available upon request.