

QCLF-11-40

DC~11MHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

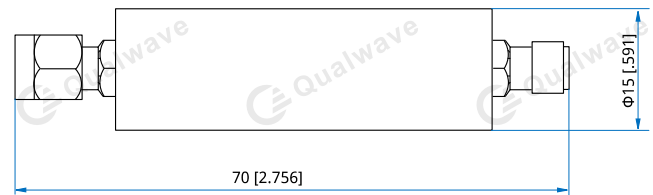
Frequency:	DC~11MHz
Insertion Loss:	1dB
VSWR:	1.45
Stop Band Attenuation:	40dB@23~200MHz
Impedance:	50Ω

Mechanical

Size:	70*Φ15mm
	2.756*Φ0.591in
RF Connectors:	SMA
Cavity:	Gold plated copper
Weight:	50g max.

Environmental

Operating Temperature:	4K (-269.15°C)
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: .x±1mm [±0.039in]

How To Order
QCLF-11-40

Customization is available upon request.