

QCLF-8500-30

DC~8.5GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~8.5GHz
Insertion Loss:	0.5dB
VSWR:	1.45
Stop Band Attenuation:	30dB@15~20GHz
Impedance:	50Ω


Mechanical

Size:	66.9*Φ9.8mm
	2.634*Φ0.386in
RF Connectors:	SMA
Cavity:	Gold plated copper
Weight:	30g max.

Environmental

Operating Temperature:	4K (-269.15°C)
Non-operating Temperature:	-55~+85°C

Outline Drawings

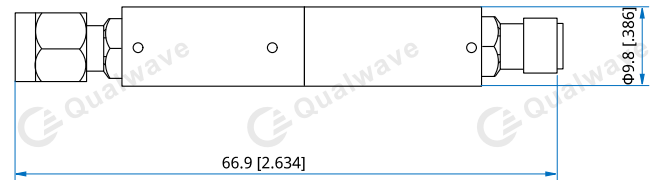

Unit: mm [in]

Tolerance: .x±1mm [±0.039in]

How To Order

QCLF-8500-30

Customization is available upon request.