

QCSDC-4000-8000-20-S

4~8GHz, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	4~8GHz
Coupling:	20±1dB
Insertion Loss:	0.2dB
VSWR:	1.22
Impedance:	50Ω


Mechanical

Size:	61*25.5*12.9mm 2.402*1.004*0.508in
Connectors:	SMA female
Cavity:	Aluminum alloy
Weight:	50g max.
Mounting:	2-Φ2.8mm through-hole

Environmental

Operation Temperature:	4K (-269.15°C)
Non-operation Temperature:	-55~+85°C

Outline Drawings

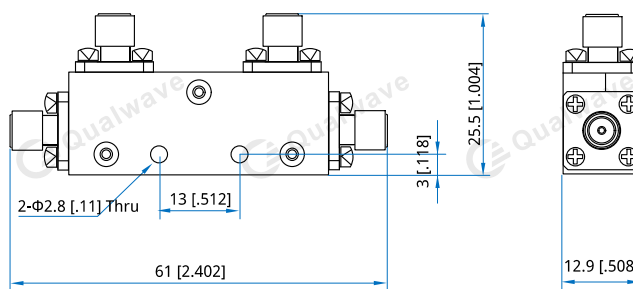

Unit: mm [in]

Tolerance: .x±1mm [±0.039in]

How To Order

QCSDC-4000-8000-20-S

Customization is available upon request.