

QDB-100-6000-3K-44F

0.1~6GHz

Features:

- * Broadband
- * Low VSWR

Applications:

- * Telecom
- * Instrumentation
- * Laboratory Test
- * Radar

Electrical

Frequency Range:	0.1~6GHz
Impedance:	50Ω
Voltage:	3000V

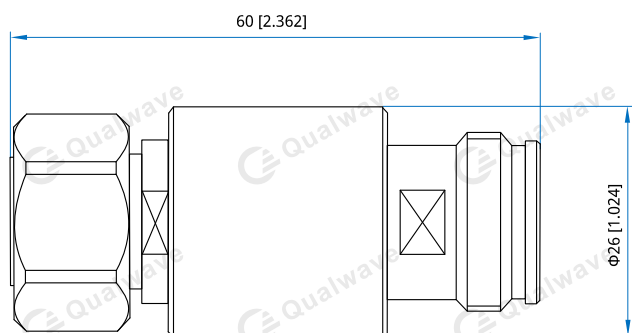
Frequency (GHz)	Insertion Loss (dB max.)	VSWR (max.)
0.1~3	0.2	1.15
3~6	0.3	1.25

Mechanical

Length:	60mm 2.362in
Connectors:	4.3/10 male 4.3/10 female
Outer Conductors:	Ternary plated copper
Female Inner Conductors:	Silver plated copper
Male Inner Conductors:	Silver plated copper
Type:	Inner

Environmental

Operating Temperature:	-45~+55°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order
QDB-100-6000-3K-44F

Customization is available upon request.