

QDB-80-6000-3K-NNF

0.08~6GHz

Features:

- * Broadband
- * Low VSWR

Applications:

- * Telecom
- * Instrumentation
- * Laboratory Test
- * Radar

Electrical

Frequency Range:	0.08~6GHz
Impedance:	50Ω
Voltage:	3000V max.

Frequency (GHz)	Insertion Loss (dB max.)	VSWR (max.)
0.08~3	0.25	1.15
3~6	0.35	1.25


Mechanical

Length:	78.5mm 3.091in
Connectors:	N male N female
Outer Conductors:	Ternary alloy plated brass
Female Inner Conductors:	Silver Plated Beryllium Copper
Male Inner Conductors:	Silver Plated Brass
Type:	Inner / Outer

Environmental

Operating Temperature:	-45~+55°C
------------------------	-----------

Outline Drawings

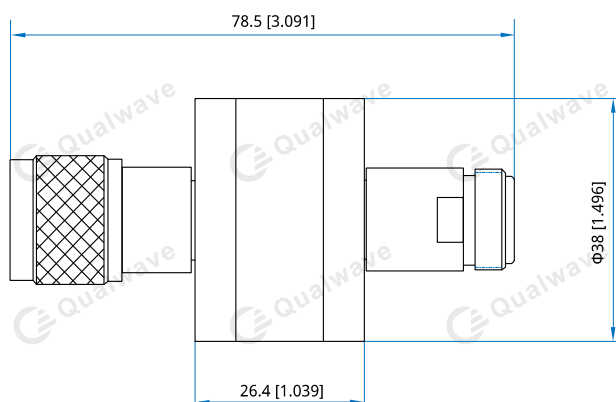

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDB-80-6000-3K-NNF

Customization is available upon request.