

QDDC-0.004-400-K12-40-S

0.004~400MHz, 120W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.004~400MHz
Insertion Loss:	0.8dB max.
Coupling:	40±2dB
Directivity:	12dB min.
Coupling Flatness:	±2dB max.
VSWR (Mainline):	1.35 max.
Average Power:	120W
Impedance:	50Ω

Mechanical


Size ^{*1} :	50.8*50.8*22.35mm 2*2*0.88in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

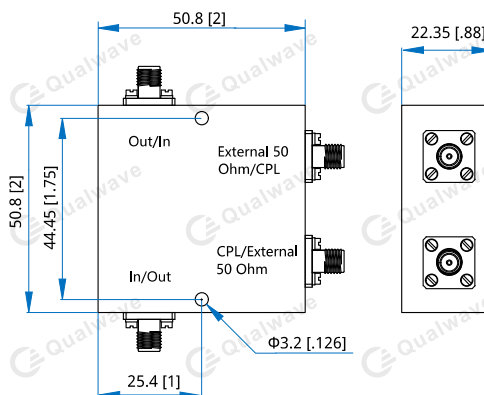

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-0.004-400-K12-40-S

Customization is available upon request.