

QDDC-0.009-500-K2-40-NS

9KHz~0.5GHz, 200W, 40dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	9KHz~0.5GHz
Coupling:	40±1dB
Coupling Flatness:	±0.5dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.5dB max.
Directivity:	20dB min.
Power Handling:	200W

Mechanical


Size ^{*1} :	152.4*55.9*55.9mm 6*2.201*2.201in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M3-6H-D8mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

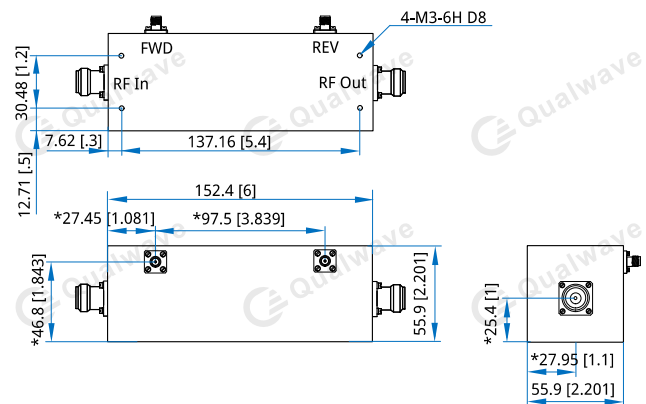

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

*Ensure dimensions for design.

How To Order

QDDC-0.009-500-K2-40-NS

Customization is available upon request.