

QDDC-1-500-K2-40-NS

1~500MHz, 200W, 40dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	1~500MHz
Coupling:	40±1dB
Coupling Flatness:	±0.8dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.6dB max.
Directivity:	18dB min.
Power Handling:	200W CW

Mechanical


Size ^{*1} :	152.4*55.9*55.9mm 6*2.201*2.201in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M3-6H D8mm

[1] Exclude connectors

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

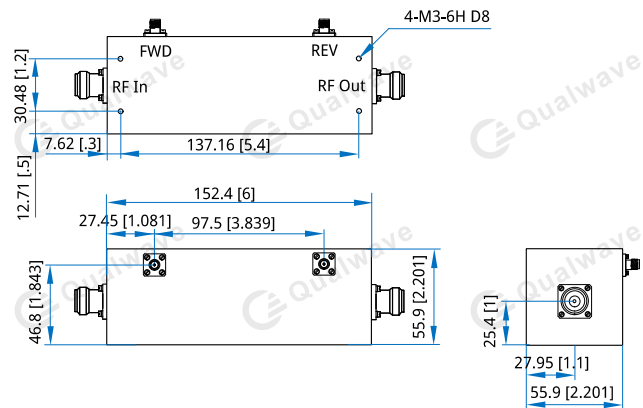

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QDDC-1-500-K2-40-NS

Customization is available upon request.