

QDDC-1.5-1300-30-40-N

1.5~1300MHz, 30W, 40dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	1.5~1300MHz
Insertion Loss:	1.5dB max.
Coupling:	40±2dB
Directivity:	15dB min.
VSWR (Mainline):	1.5 max.
Average Power:	30W
Impedance	50Ω

Mechanical


Size*1:	70*68*41mm 2.756*2.677*1.614in
Connectors:	N Female

[1] Exclude connectors

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-40~+70°C

Outline Drawings

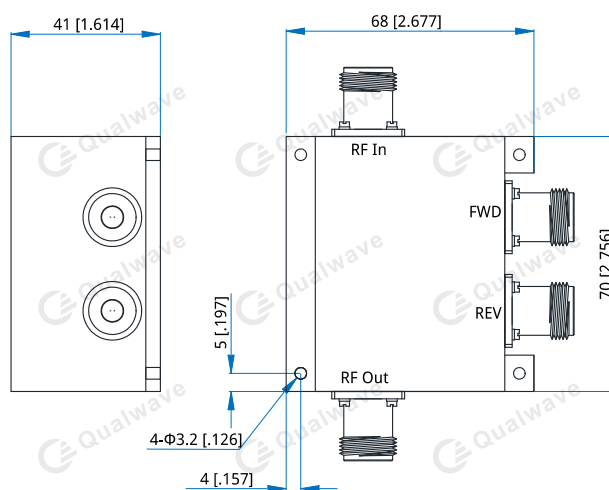

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-1.5-1300-30-40-N

Customization is available upon request.