

QDDC-1.5-30-2K5-50-N

1.5~30MHz, 2500W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	1.5~30MHz
Insertion Loss:	0.05dB max.
Coupling:	50±0.75dB
Directivity:	30dB min.
VSWR (Mainline):	1.15 max.
Average Power:	2500W
Impedance	50Ω

Mechanical


Size*1:	146*100*47mm 5.748*3.937*1.85in
Connectors:	N Female

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

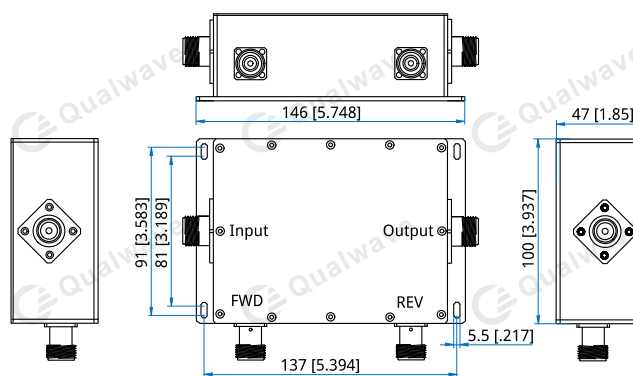

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QDDC-1.5-30-2K5-50-N

Customization is available upon request.