

QDDC-1.6-30-2K-60-NS

1.6~30MHz, 2KW, 60dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	1.6~30MHz
Coupling:	60±1dB
Coupling Flatness:	±0.1dB max.
Coupling Stopband	
Attenuation:	20dBc@44~90MHz min.
VSWR (Mainline):	1.1 max.
VSWR (Coupling):	1.5 max.
Insertion Loss:	0.05dB max.
Directivity:	20dB min.
Power Handling:	2KW

Mechanical

Size ^{*1} :	68*38*38mm 2.677*1.496*1.496in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M2.5-D4mm through-hole

[1] Exclude connectors

Outline Drawings

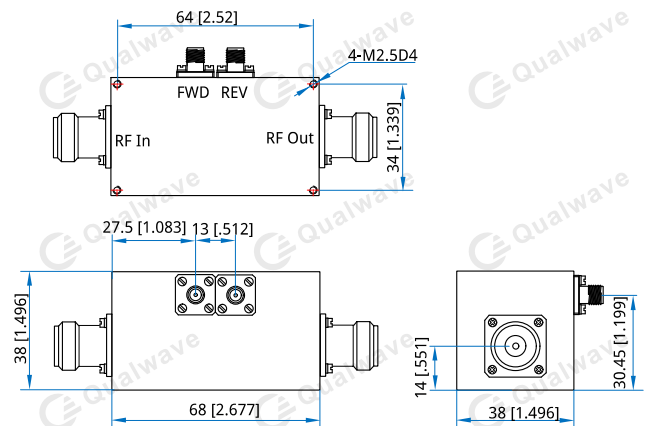

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QDDC-1.6-30-2K-60-NS

Customization is available upon request.