

QDDC-110-2000-K5-20-N

0.11~2GHz, 500W, 20dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.11~2GHz
Insertion Loss:	0.8dB max.
Coupling:	20±2dB
Directivity:	15dB min.
VSWR (Mainline):	1.4 max.
Average Power:	500W

Mechanical


Size ^{*1} :	200*100*20mm 7.874*3.937*0.787in
Connectors:	N Female
Mounting:	4-Φ3.6mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85
------------------------	---------

Outline Drawings

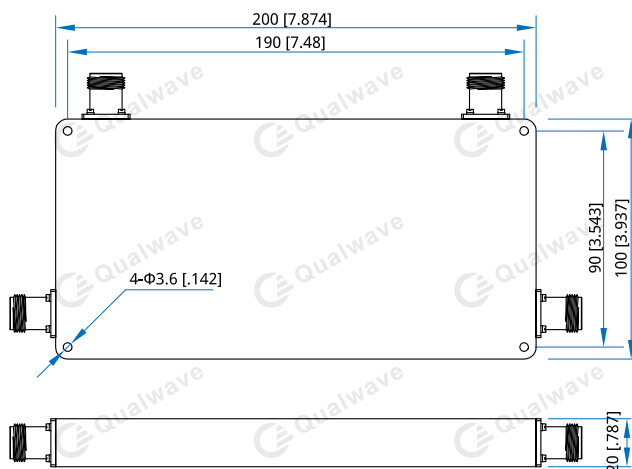

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-110-2000-K5-20-N

Customization is available upon request.