

QDDC-20-100-4K-50-7S

20~100MHz, 4000W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	20~100MHz
Insertion Loss:	0.1dB max.
Coupling:	50±1dB
Coupling Flatness:	±0.4dB max.
Directivity:	20dB min.
VSWR (Mainline):	1.1 max.
VSWR (Coupling):	1.3 max.
Average Power:	4000W CW

Mechanical

Size ^{*1} :	115*55*34mm 4.528*2.165*1.339in
Coupling Connectors:	SMA Female
RF Connectors:	L29 Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors

Outline Drawings

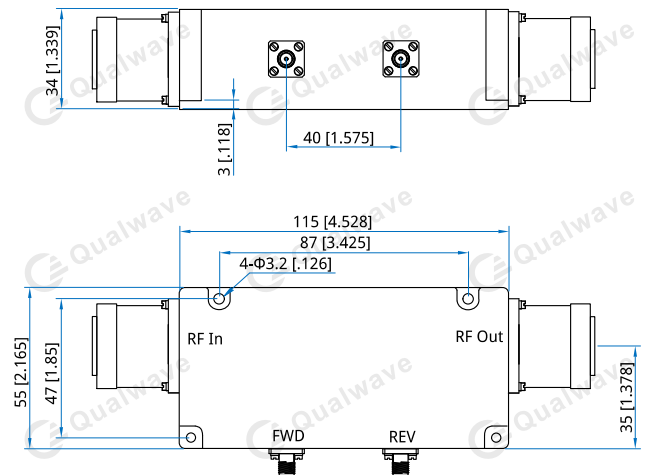

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-20-100-4K-50-7S

Customization is available upon request.