

QDDC-20-1000-K2-50-S

0.02~1GHz, 200W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.02~1GHz
Coupling:	50±1dB
VSWR (Mainline):	1.2 max.
VSWR (Coupling):	1.5 max.
Insertion Loss:	0.4dB max.
Directivity:	20dB min.
Average Power:	200W max.

Mechanical


Size ^{*1} :	51*50.8*22.35mm 2.008*2*0.88in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-45~+100°C
Non-operating Temperature:	-55~+100°C

Outline Drawings

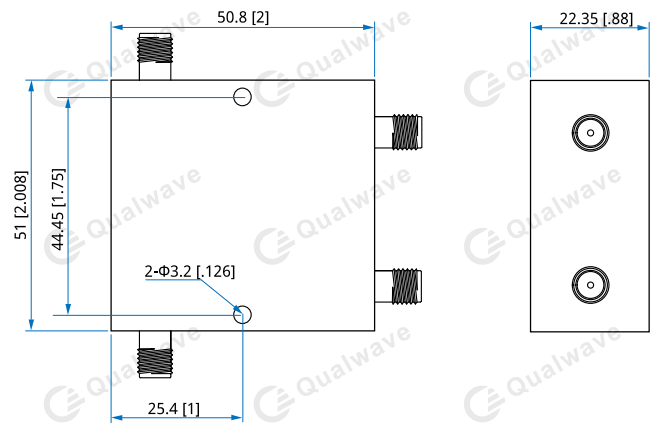

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-20-1000-K2-50-S

Customization is available upon request.