

QDDC-2000-6000-K4-40-4S

2~6GHz, 400W, 40dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	2~6GHz
Coupling:	40±1dB
Coupling Flatness:	±0.6dB
VSWR (Mainline):	1.3 max.
VSWR (Coupling):	1.5 max.
Insertion Loss:	0.3dB max.
Directivity:	15dB min.
Average Power:	400W CW

Mechanical


Size ^{*1} :	70*28*25.4mm 2.756*1.102*1in
RF Connectors:	Mini-DIN female
Coupling Connectors:	SMA female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

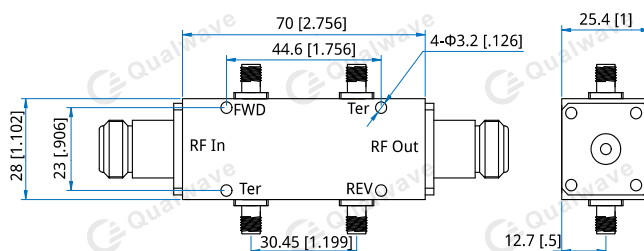

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-2000-6000-K4-40-4S

Customization is available upon request.