

QDDC-2000-6000-K65-45-7S

2~6GHz, 650W, 45dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical


Frequency:	2~6GHz
Insertion Loss:	0.3dB max.
Coupling:	45±1.5dB
Directivity:	12dB min.
VSWR:	1.5 max.
Average Power:	650W CW @6GHz 1000W CW @4GHz

Mechanical

Size ^{*1} :	58*40*32mm 2.283*1.575*1.26in
Coupling Connectors:	SMA Female
RF Connectors:	7/16 DIN Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors

Outline Drawings

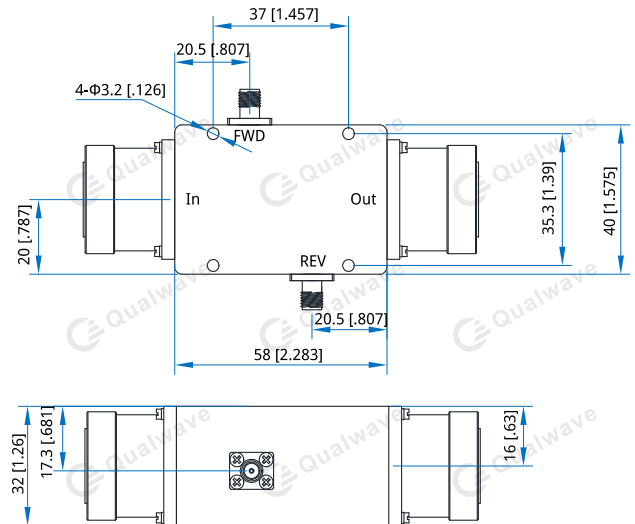

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-2000-6000-K65-45-7S

Customization is available upon request.