

QDDC-300-700-K5-50-NS

0.3~0.7GHz, 500W, 50dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.3~0.7GHz
Insertion Loss:	0.3dB max.
VSWR (Mainline):	1.3 max.
Directivity:	20dB min.
Coupling:	50±1dB
Impedance:	50Ω
Average Power:	500W

Mechanical

Size ^{*1} :	85*44*26mm
	3.346*1.732*1.024in
RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	2-Φ3mm through-hole

[1] Exclude connectors and terminations.

Outline Drawings

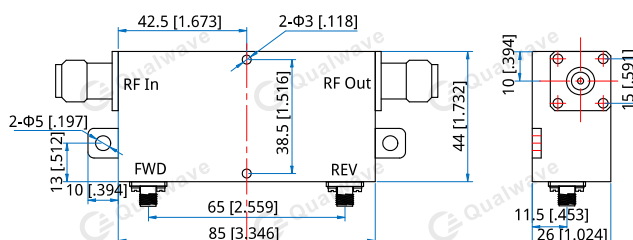

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-300-700-K5-50-NS

Customization is available upon request.