

QDDC-4000-8000-K25-50-NS

4~8GHz, 250W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	4~8GHz
Coupling:	50±1dB
Coupling Flatness:	±1dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.2dB max.
Directivity:	18dB min.
Power Handling:	250W
Peak Power:	800W

Mechanical

Size ^{*1} :	36*35.2*23mm 1.417*1.386*0.906in
RF In Connectors:	N male
RF Out Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M2.5-D6mm


[1] Exclude connectors

How To Order

QDDC-4000-8000-K25-50-NS

Customization is available upon request.

Outline Drawings

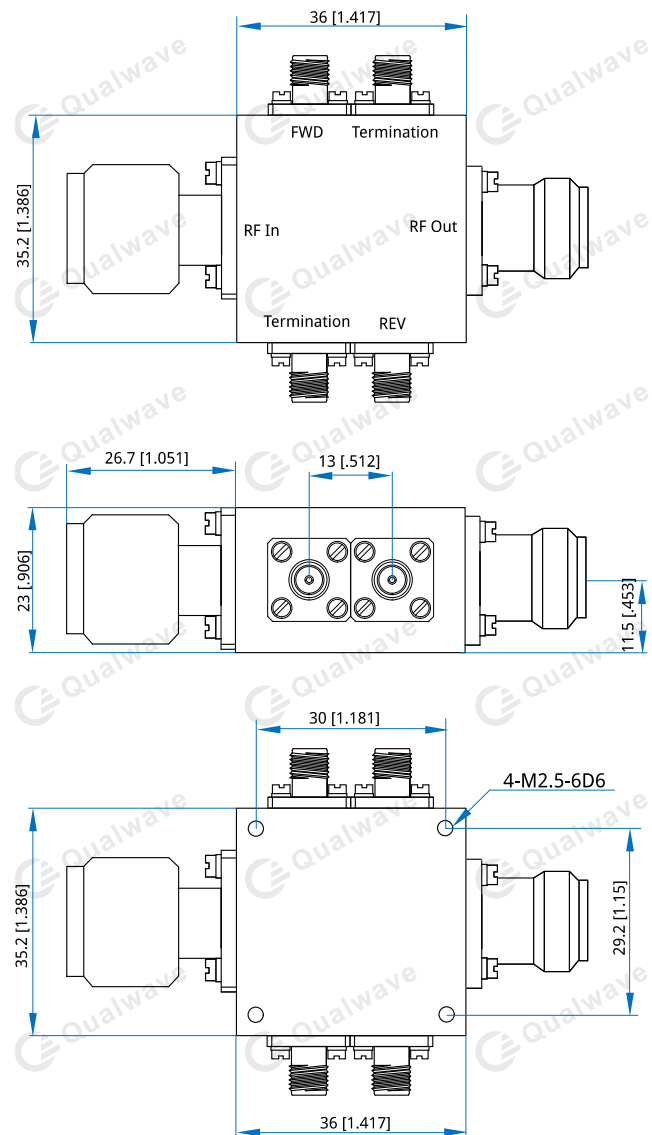

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]