

QDDC-698-3000-K5-40-NS

0.698~3GHz, 500W, 40dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.698~3GHz
Coupling:	40~41.5dB@698-960MHz 40~42dB@1800-2200MHz 39~41dB@2300-2700MHz 39~42dB@698-3000MHz
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.3dB max.
Directivity:	18dB min.
Average Power:	500W min.

Mechanical

Size ^{*1} :	116*36*21mm 4.567*1.417*0.827in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-Φ3mm through-hole

[1] Exclude connectors

Outline Drawings

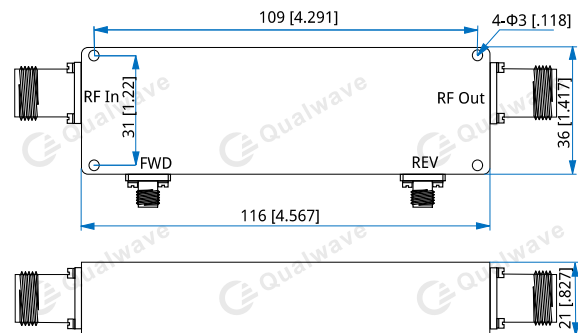

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QDDC-698-3000-K5-40-NS

Customization is available upon request.