

QDDC-700-6000-K5-40-N

0.7~6GHz, 500W, 40dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical


Frequency:	0.7~6GHz
Coupling:	40±1dB
Coupling Flatness:	±0.75dB max.
VSWR (Mainline):	1.2 max.
VSWR (Coupling):	1.4 max.
Insertion Loss:	0.3dB max.
Directivity:	20dB min.
Power Handling:	500W

Mechanical

Size ^{*1} :	148*42.5*32mm 5.827*1.673*1.26in
RF Connectors:	N female
Coupling Connectors:	N female

[1] Exclude connectors

Outline Drawings

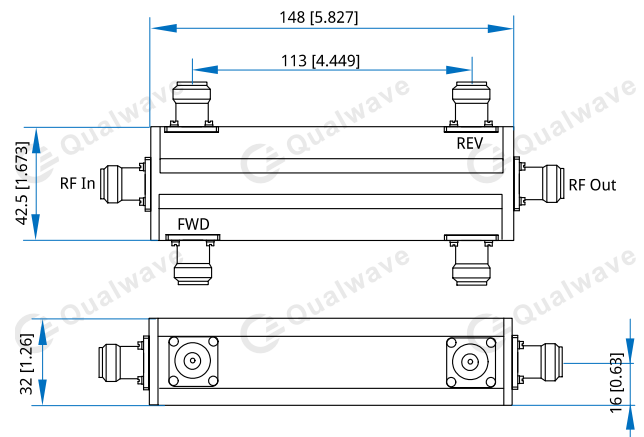

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QDDC-700-6000-K5-40-N

Customization is available upon request.