

QDDC-80-1000-K8-50-N7

0.08~1GHz, 800W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.08~1GHz
Coupling:	50±1dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.3dB max.
Directivity:	18dB min.
Average Power:	800W

Mechanical


Size ^{*1} :	85*48*32mm 3.346*1.89*1.26in
RF Connectors:	N female, 7/16 DIN male
Coupling Connectors:	SMA female
Mounting:	4-Φ5mm through-hole

[1] Exclude connectors

Environmental

Temperature:	-40~+70°C
--------------	-----------

Outline Drawings

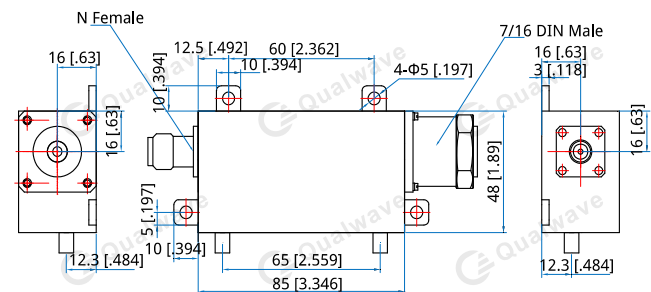

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDDC-80-1000-K8-50-N7

Customization is available upon request.