

QDPHA-17700-21200-15-K

17.7~21.2GHz, 15dB, 2.92mm

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast


Electrical

| | |
|---------------|---|
| Frequency: | 17.7~21.2GHz |
| Gain: | 15dB min. |
| VSWR: | 1.3 max. |
| Axial Ratio: | 1dB max. |
| Polarization: | Left hand circular polarization Right hand circular polarization |

Mechanical

| | |
|-------------|----------------------|
| Connectors: | 2.92mm Female |
| Material: | Copper |
| Finish: | Pickling passivation |
| Coating: | Black paint |

Outline Drawings

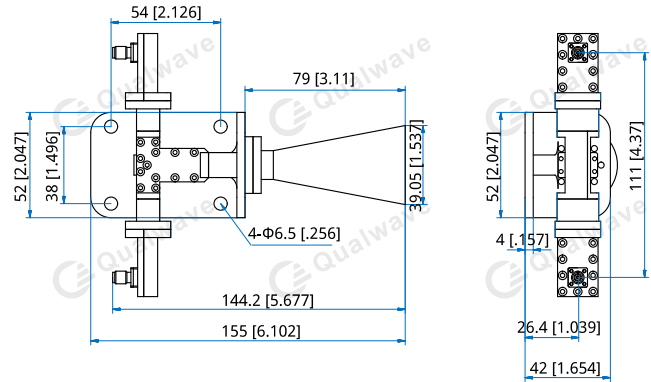

Unit: mm [in]
Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

QDPHA-17700-21200-15-K

Customization is available upon request.