

## QE-8500-9200-S-2

8.5~9.2GHz, 2dB

Features:  
\* Low VSWR  
\* Small Size

Applications:  
\* Amplifier  
\* Laboratory Test  
\* Instrumentation

### Electrical

Frequency:	8.5~9.2GHz
Insertion Loss:	0.8dB max.
VSWR:	1.5 max.
Slope:	2dB
Attenuation:	2.8dB @8.5GHz 0.8dB @9.2GHz
Linearity:	±0.5dB
Power Handling:	24dBm max.

### Mechanical

Size <sup>*1</sup> :	30*20*12mm 1.181*0.787*0.472in
Connectors:	SMA Female (50Ω)
Mounting:	4-Φ2.2mm through-hole


[1] Exclude connectors.

### Environmental

Operating Temperature:	-45~+75°C
------------------------	-----------

### Outline Drawings

(The above appearance is universal, and there may be slight variations in the appearance of this model.)

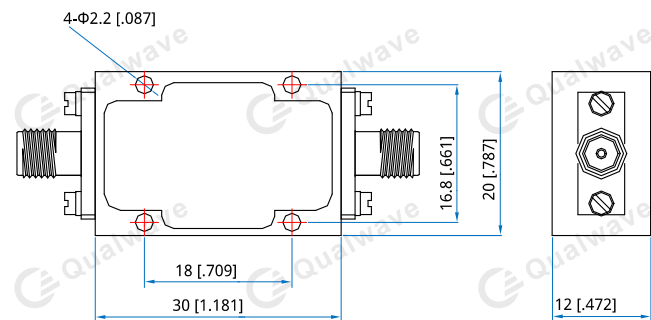

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QE-8500-9200-S-2**

Customization is available upon request.