

QFA031K

DC~3GHz, 1000W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~3GHz
Attenuation:	40, 50dB
Attenuation Accuracy:	±2dB max.
VSWR:	1.4 max.
Impedance:	50Ω
Average Power*1:	1000W@25°C max.
Peak Power:	10KW (5μs pulse width, 10% duty cycle)

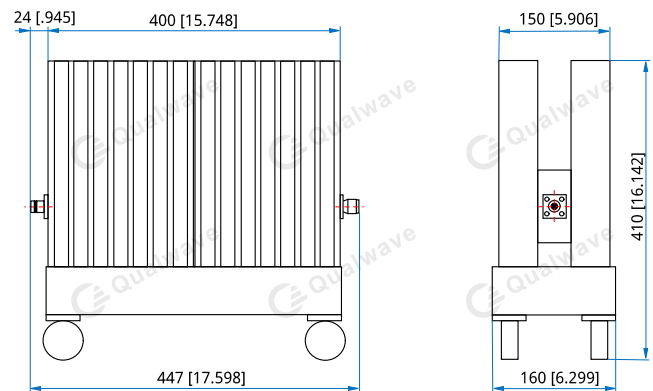
[1] Derated linearly to 100W@125°C.

Mechanical

RF Connectors:	N, 7/16 DIN
Weight:	20kg
Housing:	Aluminum
Outer Conductor:	Nickel plated brass
Male Inner Conductor:	Gold plated brass
Female Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings


Unit: mm [in]
Tolerance: ±3%

How To Order
QFA031K-X-Y-Z

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Connector naming rules:

N - N

7 - 7/16 DIN

Examples:

To order an attenuator, DC~3GHz, N male to N female, 30dB attenuation, specify QFA031K-3-30-N.