

QFA1825

DC~18GHz, 25W



Features:
 * Low VSWR
 * High Attenuation Flatness

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency: DC~18GHz
 Attenuation: 1~50dB
 Impedance: 50Ω
 Average Power^{*1}: 25W@25°C

[1] Derated linearly to 1.25W@120°C.

Mechanical

Size^{*2}: Φ44*89mm
 Φ1.732*3.504in
 Size^{*3}: Φ44*94mm
 Φ1.732*3.701in
 RF Connectors^{*2}: N Male, N Female
 RF Connectors^{*3}: SMA Male, SMA Female

[2] N connectors.
 [3] SMA connectors.

Environmental

Temperature: -55~+125°C


Peak Power

Peak Power (W)	Pulse Width (μs)	Duty Cycle (%)	Applicable Scope
500	5	2.5	@SMA,DC~18GHz
5000		1.25	@N,DC~12.4GHz
1000		1.25	@N,18GHz

Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)				VSWR (max.)
	1~10	11~20	21~30	40~50	
DC~4	0.4	0.5	0.6	0.7	1.2
DC~8	0.5	0.6	0.8	0.8	1.25
DC~12.4	0.7	0.8	0.9	1.0~1.1	1.35
DC~18	0.8	0.9	1.1	1.2~1.3	1.45

Outline Drawings

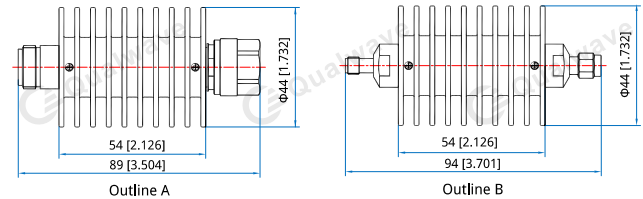

Unit: mm [in]
 Tolerance: ±2mm [±0.08in]

How To Order

QFA1825-X-Y-Z
 X: Frequency in GHz
 Y: Attenuation in dB
 Z: Connector type

Connector naming rules:
 N - N (Outline A)
 S - SMA (Outline B)

Examples:
 To order an attenuator, DC-18GHz, N male to N female, 3dB attenuation, specify QFA1825-18-3-N.