

QHF-11000-42000-60

11~42GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	11~42GHz
Passband Insertion Loss:	3.5dB max.
VSWR:	2.2 max.
Stopband Attenuation:	60dB@DC~10GHz min.


Mechanical

RF Connectors:	2.92mm Female
Mounting:	4- Φ 2.3mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

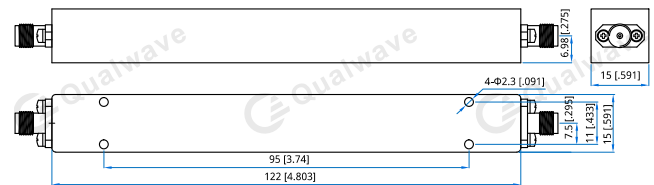

Unit: mm [in]

Tolerance: \pm 0.2mm [\pm 0.008in]

How To Order

QHF-11000-42000-60

Customization is available upon request.