

QHF-2000-19000-55

2~19GHz, 55dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2~19GHz
Passband Insertion Loss:	1dB max.
VSWR:	2 max.
Stopband:	30GHz
Stopband Attenuation:	55dB min. @DC-1.55GHz
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	27*20*10mm 1.063*0.787*0.394in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

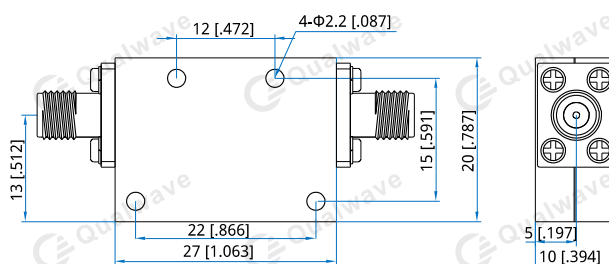

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QHF-2000-19000-55

Customization is available upon request.