

QHF-2400-6000-35

2.4~6GHz, 35dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.4~6GHz
Passband Insertion Loss:	2.0dB max.
VSWR:	1.5 max.
Stopband Attenuation:	35dB@DC~2.2GHz min.
Power:	1W

Mechanical

Size*1:	30*12*10mm 1.181*0.472*0.394in
RF Connectors:	SMA Female
Mounting:	4-M2 through-hole (H=5mm)

[1] Exclude connectors.

Environmental


Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

How To Order

QHF-2400-6000-35

Customization is available upon request.

Outline Drawings

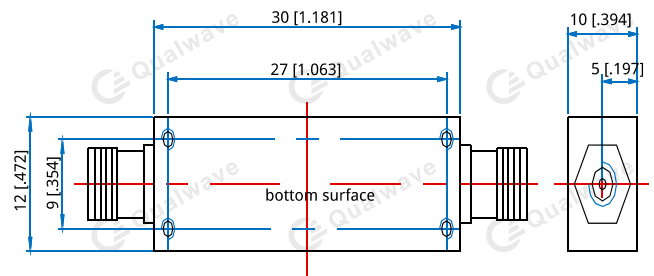

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]