

## QHF-2500-14000-60

2.5~14GHz, 60dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	2.5~14GHz
Insertion Loss:	1.2dB max.
VSWR:	2 max.
Stopband Attenuation:	60dB@DC~2.1GHz min.
Input Power:	10W
Impedance:	50Ω

### Mechanical

Size*1:	39*20*10mm 1.535*0.787*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

### Environmental


Operating Temperature:	-40~+85°C
------------------------	-----------

### How To Order

**QHF-2500-14000-60**

Customization is available upon request.

### Outline Drawings

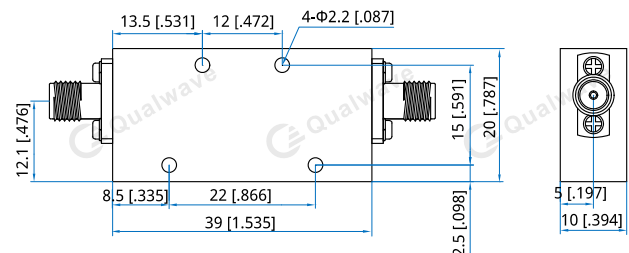

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]