

## QLA-2000-8000-24-10

### 2~8GHz, 24dB, 1.0dB

Features:  
 \* Broadband  
 \* Low Noise

Applications:  
 \* Wireless  
 \* Receiver  
 \* Laboratory Test  
 \* Radar



### Description

This product series features ultra-wideband low-noise amplifiers (LNAs) operating from 2 to 8GHz. The lineup includes:

- LNA modules powered by 5-15V DC, where increasing supply voltage enhances gain and output power;
- LNA systems with integrated switching-mode power supplies (SMPS) accepting 85-265V AC input, recommended for most applications;
- LNA systems employing linear-regulated power supplies for 220V AC operation, delivering optimal performance where extreme power purity is critical.

### Electrical

Frequency:	2~8GHz
Small Signal Gain:	24dB typ.
Gain Flatness:	±0.5dB typ.
Output Power (P1dB):	15dBm typ.
Noise Figure:	1.0dB typ.
Spurious:	-60dBc max.
VSWR:	1.8 typ.
Reverse Isolation:	-35dB typ.
Voltage:	+5V DC (Outline A) +6~15V DC (Outline B) +85~+265V AC (Outline C) +220V AC (Outline D)
Current:	60mA typ. (Outline A, B)
Impedance:	50Ω

### Absolute Maximum Ratings\*1

RF Input Power:	+20dBm
Voltage:	+7V (Outline A) +20V (Outline B)

[1] Permanent damage may occur if any of these limits are exceeded.




### Mechanical

RF Connectors: SMA Female (Removable)

### Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

### Outline Drawings

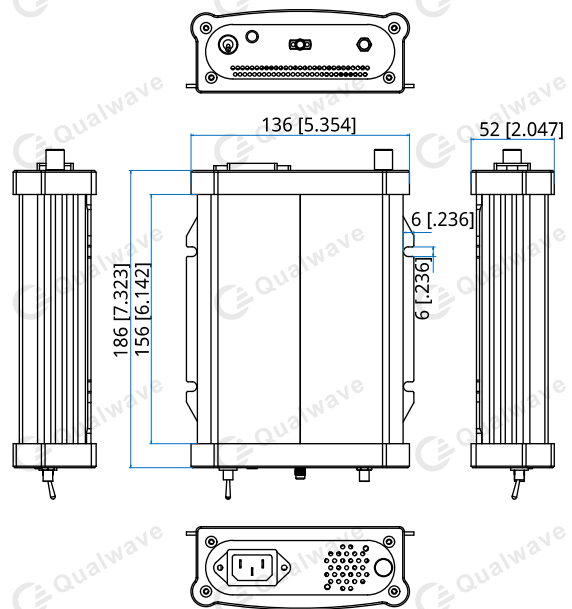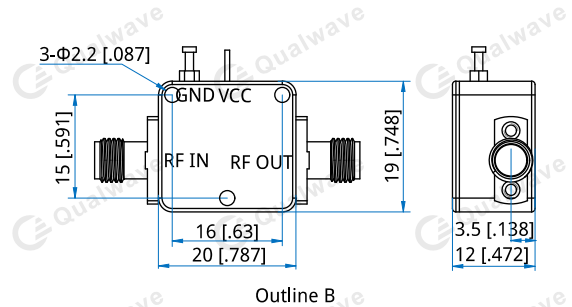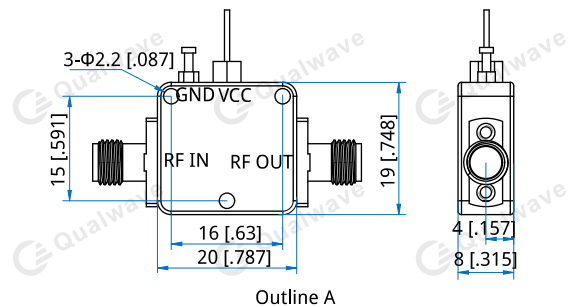

## How To Order


**QLA-2000-8000-24-10** - Outline A

**QLA-2000-8000-24-10-1** - Outline B

**QLAS-2000-8000-24-10** - Outline C, AC-powered unit integrates a switching-mode power supply.

**QLAS-2000-8000-24-10-1** - Outline D, AC-powered unit integrates a linear-regulated power supply.

Customization is available upon request.

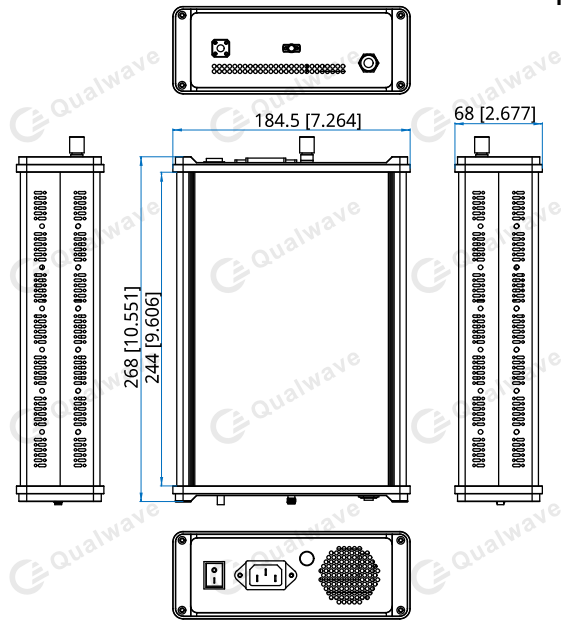

Outline D: Enclosure 0-000006

Unit: mm [in] Tolerance:  $\pm 0.5\text{mm}$  [ $\pm 0.02\text{in}$ ]

## Typical Performance Curves

