

QWTD500-5 WRD-500, 5W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching


Electrical

Frequency: 5~18GHz
Average Power: 5W
VSWR: 1.05 max.

Mechanical

Waveguide Size: WRD-500
Flange: FPWRD500

Outline Drawings

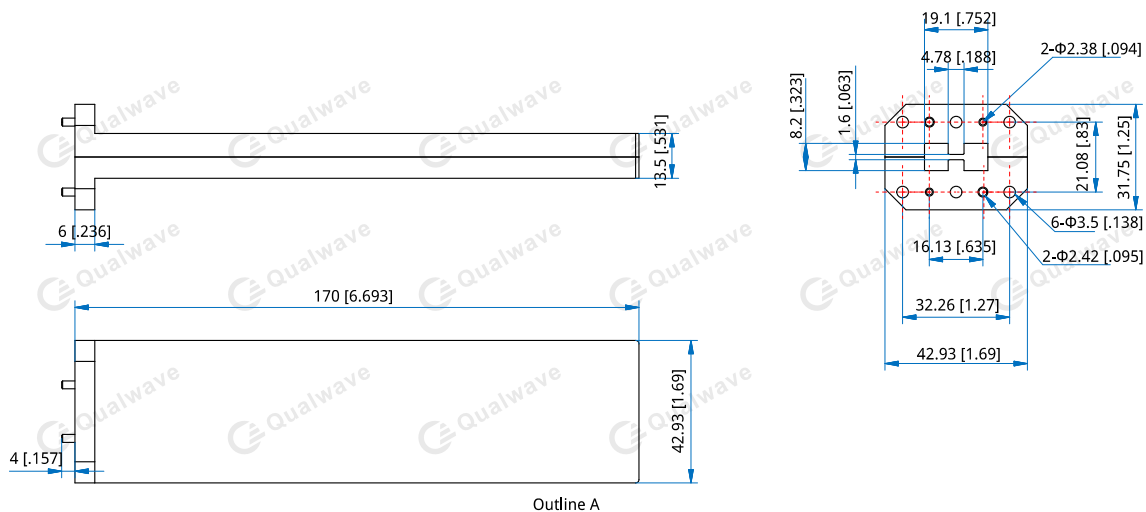

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWTD500-5-Y-Z

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

8 - FPWRD (Outline A)

Examples:

To order a low power waveguide termination, WRD-500, 5W, Aluminum, FPWRD500, specify QWTD500-5-A-8.

Customization is available upon request.