

QWT28-50

WR-28, 50W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching


Electrical

Frequency: 26.3~40GHz
 Average Power: 50W
 VSWR: 1.2 max.

Mechanical

Size: 196*32*32mm
 3.78*1.26*1.26in
 Interface: WR-28 (BJ320)
 Flange: FBM320

Outline Drawings

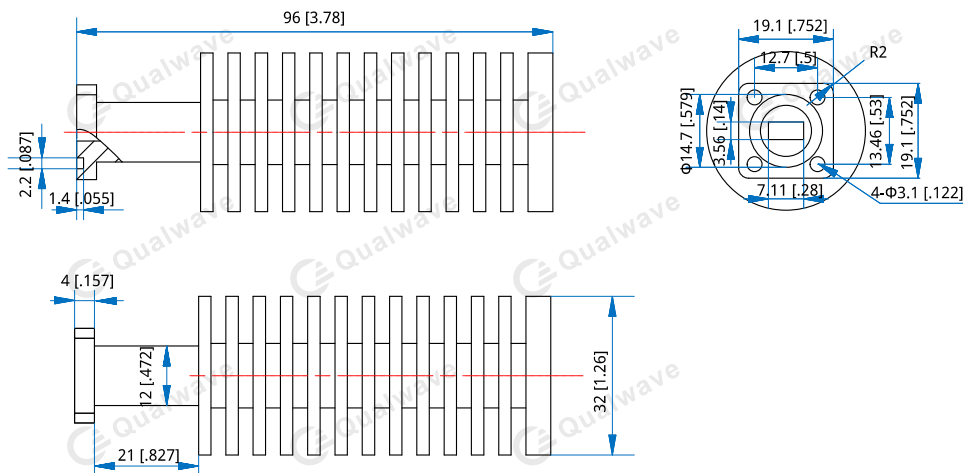

Unit: mm [in]
 Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWT28-50-Y-Z

Y : Material
 Z : Flange type

Material naming rules:
 A - Aluminium

Flange naming rules:
 3 - FBM

Examples:
 To order a medium power waveguide termination, WR-28, 50W, Aluminium, FBM320, specify QWT28-50-A-3.

Customization is available upon request.