

QWT28-K25

WR-28, 250W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 26.5~40GHz
Average Power: 250W
VSWR: 1.2 max.


Mechanical

Waveguide Size: WR-28 (BJ320)
Flange: FBP320
Finish: Conductive oxidation
Coating: Black paint

Environmental

Temperature: -40~+125°C

Outline Drawings

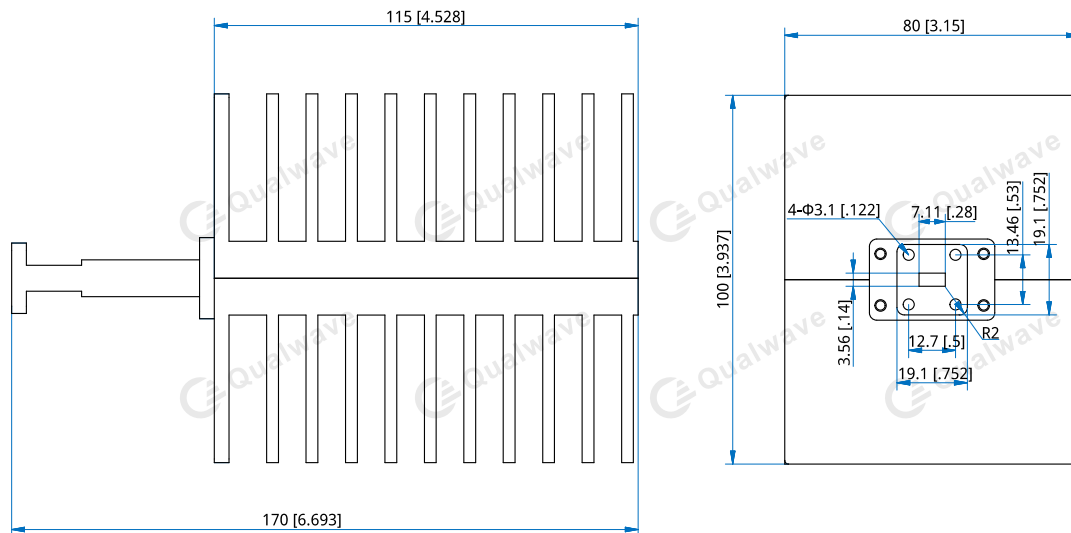

Outline A

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWT28-K25-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

1 - FBP320 (Outline A)

Examples:

To order a medium power waveguide termination, WR-28, 250W, Aluminum, FBP320, specify QWT28-K25-A-1.

Customization is available upon request.