

QPDO-E-10-10

External Reference, 10MHz, 10GHz

Features:

- * High Frequency Stability
- * Ultra Low Phase Noise

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Output Frequency:	10GHz
Output Power:	13dBm min.
External Reference:	10MHz
Reference Input Power:	0±3dBm
Output Phase Noise:	-88dBc/Hz @100Hz max. -112dBc/Hz @1KHz max. -120dBc/Hz @10KHz max. -120dBc/Hz @100KHz max. -140dBc/Hz @1MHz max.
Output Spurious:	-70dBc max.
Output Harmonic:	-20dBc max.
Voltage:	+12V
Current:	550mA max. (stable) 700mA max. (first)
Lock Indicator (LI):	TTL logic High: locked Low: unlocked
ALM:	TTL logic High: Yes Low: No


Mechanical

Size ^{*1} :	57.2*57.2*33.8mm 2.252*2.252*1.331in
RF Connectors:	SMA Female
Power Supply Interface:	Feed Through/Terminal Post
Mounting:	3-Φ3.2mm through-hole

Environmental

Operating Temperature:	-40~+75°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

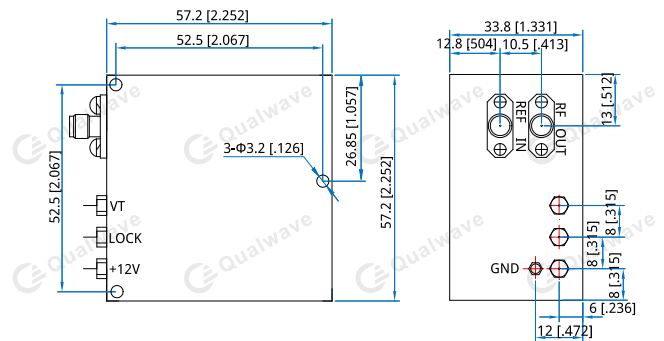

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPDO-E-10-10

Customization is available upon request.