

QPDO-E-25-17.25-1

External Reference, 25MHz, 17.25GHz

Features:

- * High Frequency Stability
- * Ultra Low Phase Noise

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Radar

Electrical

Output Frequency:	17.25GHz
Output Power:	+13~+15dBm
Reference Input Power:	+7~+13dBm
Output Spurious:	-76dBc max. @±(10MHz to 2GHz)
Output Harmonics:	-20dBc max. @8.625GHz&25.875GHz
External Reference:	25MHz (-110dBc/Hz max. @10Hz -137dBc/Hz max. @100Hz -150dBc/Hz max. @1KHz -165dBc/Hz max. @10KHz -165dBc/Hz max. @100KHz)
Output Phase Noise:	-45dBc/Hz max. @10Hz -75dBc/Hz max. @100Hz -85dBc/Hz max. @1KHz -97dBc/Hz max. @10KHz -104dBc/Hz max. @100KHz -115dBc/Hz max. @1MHz -130dBc/Hz max. @10MHz -130dBc/Hz max. @100MHz
Voltage:	+12±0.5V DC
Current:	600mA max. (first) 450mA max. (stable)
Lock Indicator (LI):	TTL logic High: locked Low: unlocked

Environmental


Operating Temperature:	-45~+75°C
Non-operating Temperature:	-55~+85°C
Cold Start Temperature:	-45 °C max.

Mechanical

Size*1:	57.2*57.2*33.8mm 2.252*2.252*1.331in
RF Connectors:	SMA Female
Power Supply Interface:	Feed Through/Terminal Post
Mounting:	3-Φ3.2mm through-hole

[1] Exclude connectors.

Outline Drawings

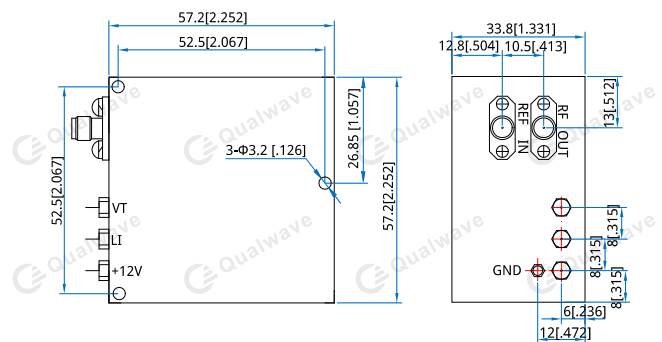

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPDO-E-25-17.25-1

Customization is available upon request.