

QPA-20-500-55-54.8S

20~500MHz, 55dB, 54.8dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	20~500MHz
Gain:	55dB min.
Gain Flatness:	3±1dB max.
Input VSWR:	1.7 max.
Output Power (Psat):	54.8dBm typ.
Input Power:	3±1dBm +10dBm max.
Spurious:	-65dBc max.
Harmonic:	-10dBc max.
Voltage:	42~48V/30A VCC
PTT:	5V (On)
Current:	20~25A max.
Impedance:	50Ω

Mechanical


Size*1:	358.5*150.5*33.5mm 14.114*5.925*1.319in
RF In Connectors:	SMA Female
RF Out Connectors:	N Female
Mounting:	8-Φ3.6mm through-hole
Power Supply Interface:	Feed Through/Terminal Post

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+55°C
------------------------	-----------

Outline Drawings

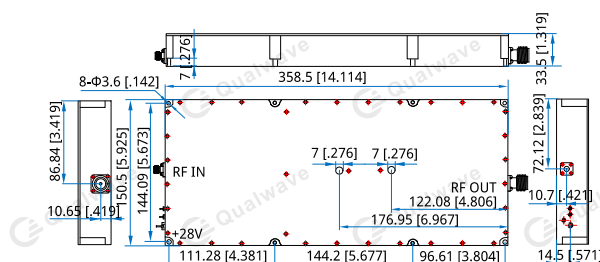

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPA-20-500-55-54.8S

Customization is available upon request.