

QPA-2000-6000-47-49S

2~6GHz, 47dB, 49dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	2~6GHz
Gain:	47dB min.
Gain Flatness:	10±1dB max.
Input VSWR:	2 max.
Output Power (Psat):	47 ~ 49dBm
Input Power:	4±2dBm
	+10dBm max.
Spurious:	-65dBc max.
Harmonic:	-6dBc min.
Voltage:	28V/15A VCC
PTT:	5V (On)
Current:	10~12.5A max
Impedance:	50Ω

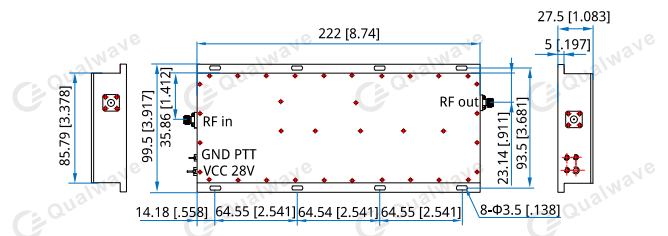
Mechanical

Size*1:	222*99.5*27.5mm
	8.74*3.917*1.083in
RF In Connectors:	SMA Female
RF Out Connectors:	SMA Female
Mounting:	8-Φ3.5mm through-hole
Power Supply Interface:	Feed Through/Terminal Post

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+55°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPA-2000-6000-47-49S

Customization is available upon request.