

QPA-2025-2100-47-50S

2.025~2.1GHz, 47dB, 50dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	2.025~2.1GHz
Gain:	47dB min.
Input VSWR:	1.7 max.
Output Power (Psat):	50dBm min.
Output Power (P1dB):	40.8dBm min.
Spurious:	-65dBc max.
Voltage:	28V/16A VCC +31V max.
Current:	11A max.
PTT:	Default on, high level (5V) shuts off
Impedance:	50Ω
Protection Function:	80°C protection

Mechanical

Size ^{*1} :	161*78*24.5mm 6.339*3.071*0.965in
RF In Connectors:	SMA Female
RF Out Connectors:	SMA Female
Mounting:	4-Φ3.6mm through-hole
Power Supply Interface ^{*2} :	Feed Through/Terminal Post


[1] Exclude connectors.

[2] Install heat sink during testing.

Environmental

Operating Temperature: -25~+55°C

Outline Drawings

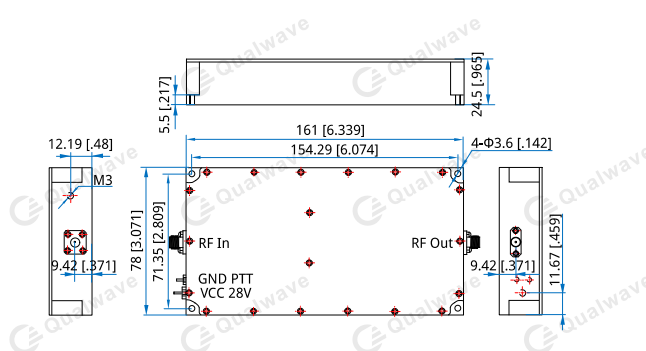

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPA-2025-2100-47-50S

Customization is available upon request.