

QPA-3500-4500-43-43S

3.5~4.5GHz, 43dB, 43dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	3.5~4.5GHz
Gain:	43dB min.
Gain Flatness:	3±1dB max.
Input VSWR:	2 max.
Output Power (Psat):	43dBm min.
Input Power:	3±2dBm +10dBm max.
Spurious:	-65dBc max.
Harmonic:	-12dBc max.
Voltage:	28V/6A VCC
PTT:	3.3~5V (On)
Current:	4A max.
Impedance:	50Ω

Mechanical


Size*1:	179.6*80.5*26.5mm 7.071*3.169*1.043in
RF In Connectors:	SMA Female
RF Out Connectors:	SMA Female
Mounting:	6-Φ3.4mm through-hole
Power Supply Interface:	Feed Through/Terminal Post

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+55°C
------------------------	-----------

Outline Drawings

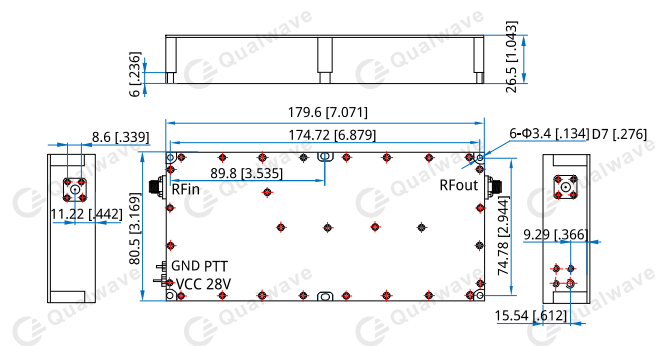

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPA-3500-4500-43-43S

Customization is available upon request.